



Cadillac Escalade 2015 - 2020

****Before you begin installing the NAVIKS unit please make sure the negative battery terminal is disconnected and the parking brake is engaged****



CAUTION

Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to prevent airbag and seat belt pre-tensioner activation.

Read entire manual before starting the installation.



Pry out left side dash cover.

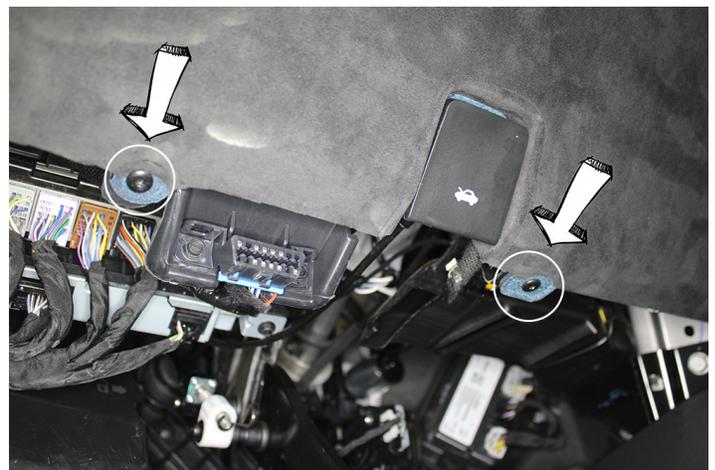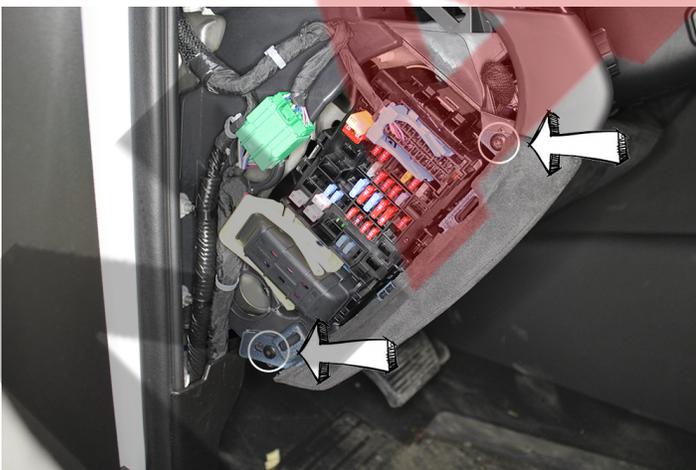

Unfasten **two (2)** screws at the side of the dash cover.
Unfasten **two (2)** screws under the steering wheel column cover.



Pry out steering wheel column cover. Disconnect **two (2)** plugs: **park switch, hood latch.**



1. Pry out wood grain dash trim bezel on passenger side of the dash. Pay close attention to the tip by the radio **it could chip.**
2. Pry out wood grain bezel on driver side, between push to start bezel and AC vents. Pay close attention to the tip by the radio **it could chip.**




Pry out driver side center console trim panel. Disconnect start button plug.



Pry out passenger side center console trim panel.




Carefully pry out trim bezel between the screen and the dash.

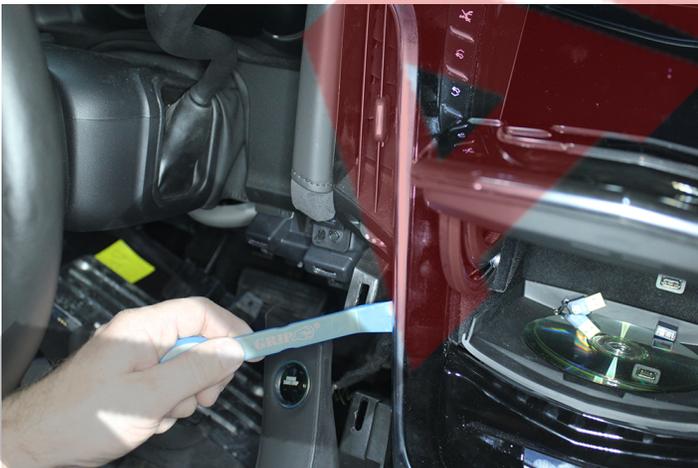

Pry out silver radio bezel to expose radio unit screws. Work your way around both sides top to bottom.




1. Unfasten **two (2)** screws around the DVD player. Remove the metal bracket.
2. Disconnect **five (5)** plugs behind DVD player and remove it.
3. Unfasten **six (6)** screws around the radio.
4. Disconnect **four (4)** plugs behind the screen and **two (2)** one on each side of screen.
5. Put radio unit to the side.

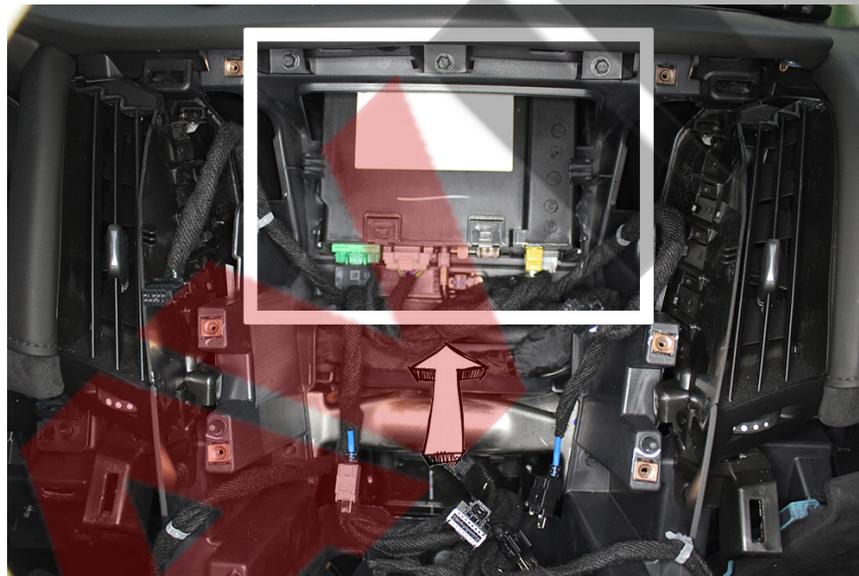

Plug & Play Connection:

1. Unplug **16-pin Green** plug and **20-pin Gray** plug at the XM module.
2. Combine OEM **16-pin Green** plug and **20-pin Gray** plug with provided plugs.

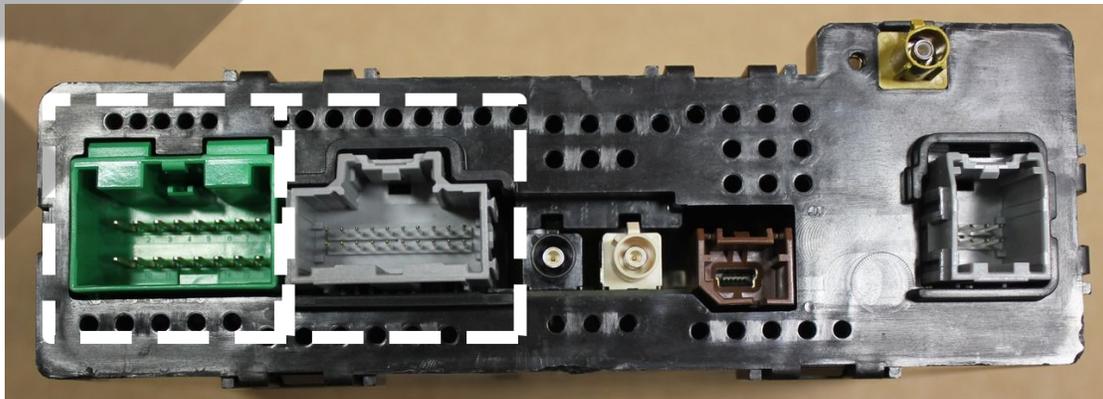

Video in Motion activation:

1. Press “**Rear Defroster**” button **four (4)** times to enable / disable video in motion function.
2. Bypass remembers last setting (enabled or disabled) before engine was turned off, there is no need to re-enable every time.

